

FRONT VIEW Break Away Curtain Track Smooth Aluminum Back Wall Anti-Ligature Grab Bar Feature Line Aluminum Anti-Ligature Grab Bar 82<u>/</u> Molded Seat $34\frac{7}{8}$ 30<u>2</u>" $18\frac{7}{8}$ " <u>-7</u>" -36"



CROSS SECTION OF THRESHOLD

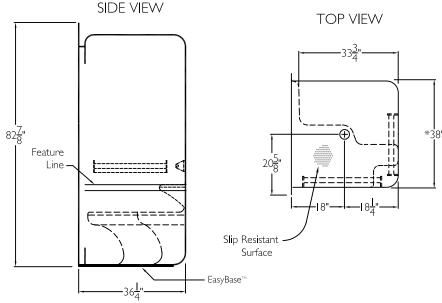

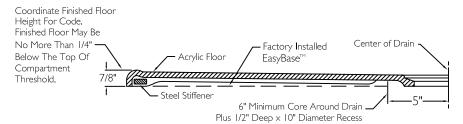

SUBMITTAL

This shower enclosure shall be model XSA 4136 BF .875 right, or left. Finished surface shall be of a sanitary grade acrylic exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 41 $I/4" \times 36 I/4" \times 82 7/8"$. The unit shall meet ANSI Z124.1-2. ANSI A117.1, ADA, HUD, BOCA, NAHB UPC, and shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following accessories:

I) One 18" × 1 1/2" diameter aluminum ant-ligarure grab bar on the back wall, 2) one 24" × 1 1/2" diameter aluminum anti ligature grab bar on the valve wall, both with 1 1/2" statute clearance, secured from the rear with stainless steel bolts and 3" × 3" × 11 gauge metal mounting plates, 3) large molded seat, 4) molded soap ledge, 5) break away curtain track, 6) tri cell backing, 7) EasyBase™ self sustaining bottom, 8) 7/8" threshold,

OPTIONAL ACCESSORIES: Factory Plumbing Install Option: YES NO						
☐ Tamper proof recessed valve and tamper proof shower head.						
☐ PB Pressure Balancing Mixing Valve						

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 41 1/4" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By	Name	Date	COMFORT DESIGNS		
Project No	Architect			Model No. XSA 4136 BF .875 COR		
Comfort Designs	Engineer			Drawing No. XSA 4136 BF .875 AlmAnti-LigHBW AlmAnti-LigHSW MS BRK EB		
435 Industrial Road	Rep			Date Issued. 4-6-12	Drawing Rev.	
Savannah, TN 38372	Wholesaler			Material Acrylic		
tel 800.443.7269	Comments			Color.		
fax 731.925.4290 www.comfortdesignsbathware.com				Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"		