SLOAN.

CODE NUMBER

10151311

DESCRIPTION

SU-1015 Urinal and ROYAL 195 ESS Flushometer.

COMPONENTS

- Flushometer: Code 3453202
- Urinal: Code 1101015

DETAILS

- Flush Volume: 0.5 gpf (1.9 Lpf)
- Nominal Dimensions: 14 ¼" × 17 ¼" × 25 ½" (362 × 438 × 648mm)

FLUSHOMETER FEATURES

Quiet, Concealed, Diaphragm Type Assembly, Rough Brass Urinal Flushometer for either

- PERMEX® Synthetic Rubber Diaphragm with Dual Linear Filtered Bypass
- Non-Hold-Open Integral Solenoid Operator, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- OPTIMA® EL-1500 Self-Adaptive Infrared Sensor with Indicator Light
- Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine Resistance
- High Back Pressure Vacuum Breaker Flush Connection and Spud Coupling for 3/4" Concealed Rear Spud
- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop

FIXTURE FEATURES

• Washdown Urinal shall be made of virteous china with a 3/4" rear spud. Urinal shall be wall mounted. Urinal shall include a removable strainer, inlet spud and hanger. Urinal shall use 0.5 gpf / 1.9 Lpf. Urinal shall be Sloan Model SU-1015-0.5.

- White Vitreous China
- Wall mounted
- Washdown flushing action
- 3/4" rear spud inlet
- 100% factory flush tested
- Integral flushing rim
- All mounting hardware included
- Carrier not included



COMPLIANCES & CERTIFICATIONS



(ADA Compliant, cUPC Green Certified, UL Certified, WaterSense Listed, BAA Compliant, Satisfies LEED Credits)

DOWNLOADS


- Standard Spud Urinal Installation Instructions
- Sloan Concealed Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads


NOTES

All information contained within this document subject to change without notice.



ROUGH-IN



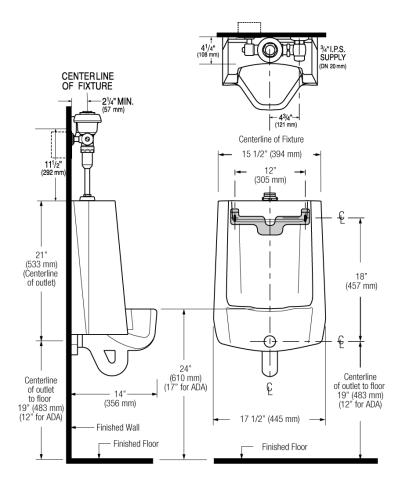

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com